


CUSTOM ELUME LED LIGHT PANELS - INDEX GUIDE

LED PANEL - FRAMELESS MAX-HIGH BRIGHTNESS

MODEL :	ELPmh/
LED OUTPUT :	MAX-HIGH OUTPUT
POWER CONSUMPTION :	WHITE: 17 W/M [5.18W/Ft]
WHITE PANEL THICKNESS :	6mm [0.23"] or RECOMMENDED 8mm [0.31"]
FRAME STYLE :	NO FRAME
WHITE BRIGHTNESS LEVEL :	11/15
RGB POWER CONSUMPTION :	RGB : 14W/M [4.27W/Ft]
RGB PANEL THICKNESS :	10mm [0.39"]
RGB BRIGHTNESS LEVEL :	8/15


FRAMELESS MAX-HIGH - PROFILE (TO SCALE)

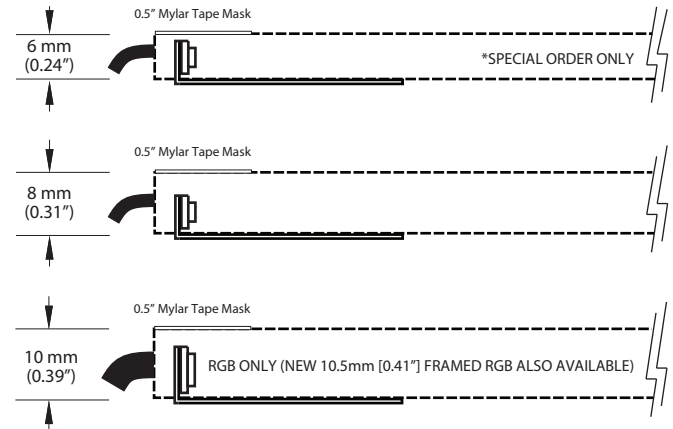

LED PANEL - MAX-HIGH BRIGHTNESS

MODEL :	ELsf-37mh/
LED OUTPUT :	MAX-HIGH OUTPUT
POWER CONSUMPTION :	17 W/M [5.18W/Ft]
FRAME THICKNESS :	8mm [0.31"]
FRAME STYLE :	SINGLE CHANNEL BACK - INVISIBLE MOUNTING
BRIGHTNESS LEVEL :	10/15


MAX HIGH - PROFILE (TO SCALE)

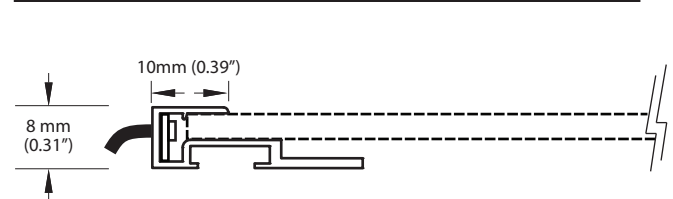

LED PANEL - EXTREME BRIGHTNESS

MODEL :	ELsf-32e/
LED OUTPUT :	EXTREME OUTPUT
POWER CONSUMPTION :	25 W/M [7.62W/Ft]
FRAME THICKNESS :	10mm (0.39")
FRAME STYLE :	DOUBLE CHANNEL BACK - INVISIBLE MOUNTING
BRIGHTNESS LEVEL :	15/15


EXTREME - PROFILE (TO SCALE)

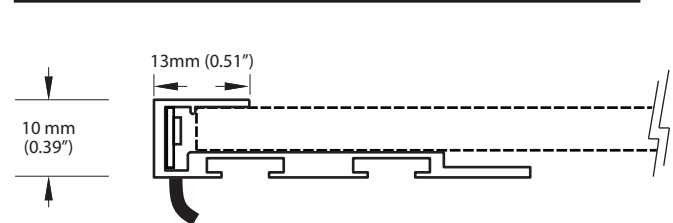

LED SLIM FIXTURE W/ DIFFUSION - MAX-HIGH OR EXTREME BRIGHTNESS

MODEL :	ELsfd-20/mh (Max-High) or ELsfd-20/e (Extreme)
LED OUTPUT :	MAX- HIGH OR EXTREME OUTPUT
POWER CONSUMPTION :	MH - 17 W/M [5.18W/Ft] E - 25 W/M [7.62W/Ft]
FRAME THICKNESS :	15mm (0.6")
FRAME STYLE :	SINGLE CHANNEL BACK
BRIGHTNESS LEVEL :	W/ DIFFUSION - MH - 9/15 E- 13/15

SLIM FIXTURE W/ DIFFUSION - PROFILE (TO SCALE)

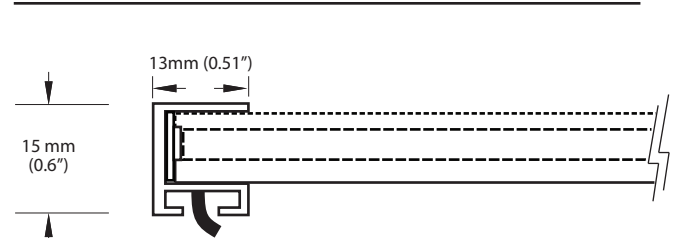

CONTACT INFO.