



CUSTOM ELUME LED LIGHT PANEL - EXTREME BRIGHTNESS


eLume Extreme LED Light Panels are thin, custom sizable, optical acrylic sheets with extreme output tier one LEDs embedded along the edge of the LED panels and an engraved light distribution pattern across the back of the panel enclosed in an aluminum frame. This light distribution pattern is optimized for each specific panel size to ensure uniform and bright illumination over the the face of the panel. With their minimal power consumption, long lifespan, uniform, bright illumination and thin, lightweight characteristics, our Extreme output eLume LED Light Panels are ideal to illuminate any translucent material compared to traditional fluorescent back lit systems.

SPECIFICATIONS.


MODEL :	ELsf32e/
OUTPUT :	EXTREME OUTPUT
POWER CONSUMPTION :	25 W/M [7.62W/Ft]
FRAME THICKNESS :	10 MM (0.39")
FRAME STYLE :	DOUBLE CHANNEL BACK
OPTICAL ACRYLIC THICKNESS :	6MM (0.24")
OPERATING VOLTAGE :	24Vdc
DIMMABILITY OPTIONS :	0~10V PWM DALI WIRELESS REMOTE
Info available upon request	*Requires additional inline dimming module
OUTPUT LEVEL OPTIONS :	LEDS EMBEDDED ALONG 1, 2 OR ALL 4 EDGES
OUTPUT COLOUR OPTIONS :	DAYLIGHT: 5800K (RECOMMENDED)
	NEUTRAL: 4100K
	WARM: 3000k
	RGB (STATIC COLOURS ALSO AVAILABLE)
WEIGHT :	1.3 Lbs (0.59 kg) / SqFt
MIN. SIZE :	4 x 4" (102 x 102 mm)
RECOMMENDED MAX. SIZE :	48 x 96" (1219 x 2438 mm)
SPECIAL ORDER MAX. SIZE :	58 x 118" (1473 x 2997 mm)
OPERATING LIFESPAN :	50,000 to 70,000 HOURS (L70)
WARRANTY :	3 YEAR WARRANTY
INPUT CONNECTOR :	2.5mm x 5.5mm PLUG n PLAY BARREL
INPUT LEAD LENGTH :	20" (508 mm) Standard
	*Custom length extensions available
INPUT CONNECTOR EXIT :	EXITS REAR OF PANEL
INPUT LEAD WIRE SIZE :	18 AWG 2 CONDUCTOR WIRE
OPERATING TEMPERATURE :	-30°C (-22 °F) ~ +40 °C (+104 °F)
POWER SUPPLY SPECS :	AVAILABLE UPON REQUEST

IMAGES :


FRONT




REAR

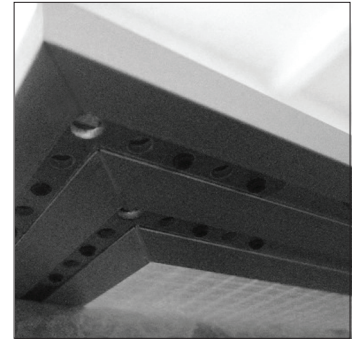

DETAILS :

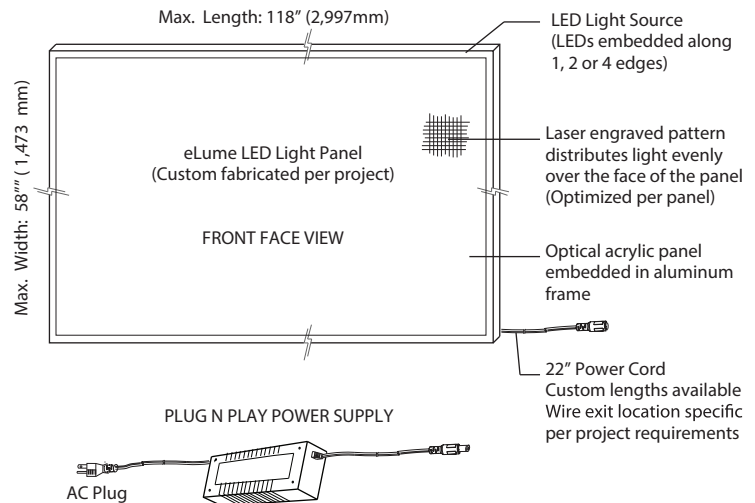

FRAME PROFILE : MORE DETAILED FRAME DIMENSIONS AVAILABLE EXTREME - PROFILE (TO SCALE)

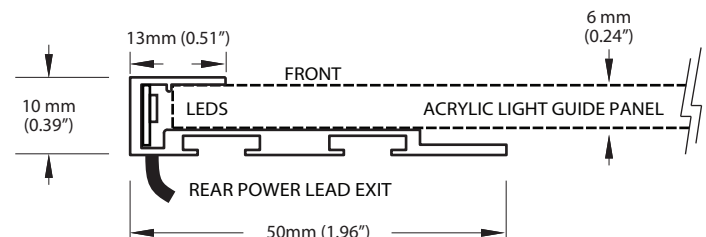

CONTACT INFO.