



LED LIGHTING SOLUTIONS ...

## DATA SHEET.

### HIGH OUPUT LED RIBBON

## DESCRIPTION.


Being a slim, flexible LED tape, cuttable every 1", with a self-adhesive 3M backing, our high output LED ribbon is ideal for a simple installation in variety of applications.

## SPECIFICATIONS.

MAX. CONTINUOUS CONNECTION :	7.6 METERS ( 25/ft)
MAX. POWER CONSUMPTION (W) :	78 WATTS ( 4.8/ ft)
MIN CUTTABLE LENGTH :	25.4 mm (1 inch)
LED QUANTITY PER 5 METER REEL :	390 LEDS ( 24/ ft)
AVAILABLE COLOURS ...	
CCT (K) - COOL :	5500° K
CCT (K) - WARM :	3500° K
LUMEN OUTPUT (lm) - COOL :	120 lm/ft @ 6000° K
LUMEN OUTPUT (lm) - WARM :	90 lm/ft @ 3500° K
BEAM ANGLE :	120°
OPERATING VOLTAGE (V) :	12 VDC
L70 RATED LIFESPAN (hrs) :	50,000 Hours
WARRANTY :	2 Years



## MOUNTING CHANNELS.

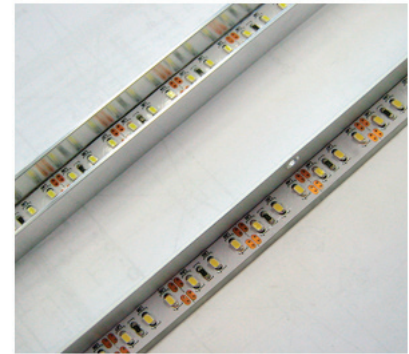

- Cuttable every 2nd LED ( Every 1 Inch )
- Field cut easily to any length needed
- Easy and quick to work with
- Ideal for coves and fluorescent replacement
- Energy efficient 12-volt DC operation
- Per foot: 4.8 watts input and 120 lumens output.
- 390 high output SMD LEDs per reel
- Segments can be daisy chained by eLume's quick connectors
- Multiple configurations utilizing eLume's "T" or "L" connectors
- 3M adhesive backing for easy installation
- Exterior waterproof model available
- 2-year Warranty

## CONTACT INFO.

www.elumination.com  
416.225.6400 - Toronto area

1750 Plummer Street, Unit 18  
Pickering, ON, Canada. L1W 3L7